

UTM Tracking in Order 2 Step

As you know you can't add fields in Order 2 Step. But you can do this via adding some JavaScript code...

Add the following code on "Head Tracking Code"

The screenshot shows the ClickFunnels 'Edit Settings For This Funnel' interface. The left sidebar contains a 'LAUNCH CHECKLIST', 'FUNNEL STEPS' (with 'Checkout' and 'Upsell #1' visible), and 'OTHER FUNNEL STEPS'. The main area is titled 'Edit Settings For This Funnel' and contains several sections: 'NAME' (with a text input containing '[THD - FB]'), 'GROUP TAG' (with an empty text input), 'DOMAIN' (with a text input and a link to 'Add/Edit Domains'), 'PATH' (with an empty text input), 'SMTP CONFIGURATION' (with a text input), 'FAVICON URL' (with an empty text input), 'HEAD TRACKING CODE' (with a text area containing a JavaScript code snippet), and 'BODY TRACKING CODE' (with a text area containing a JavaScript code snippet). The 'HEAD TRACKING CODE' section is highlighted with a red box.

The code looks like below. DON'T forget to change `<YOUR_LICENCE_KEY>` with your license key.

```
<!-- Global site UTM Simple Tracking Start-->
<script>
handl_custom_params=['_fbclid','_fbq'];var
handl_js=document.createElement("script");handl_js.setAttribute("src","https://track.utmsimple.
handl_js.onload=function(){
setTimeout(
function(){
    all = HandL.getAll()
```


```

Object.keys(all).forEach( (x) => {
  if ( all[x] ){
    if ( $(' .o2step_step1' ).length > 0){
      $(' .o2step_step1' ).prepend( `<input type="hidden" data-custom-type="handl_${x}"
class="elInput" name="custom_type" value="${all[x]}" />` )
    }
  }
}
), 1000
);
</script>
<!-- Global site UTM Simple Tracking End-->

```

BONUS: Trigger Zapier when checkout initiated...

Add the following code under Settings > Tracking Code (Footer Section)

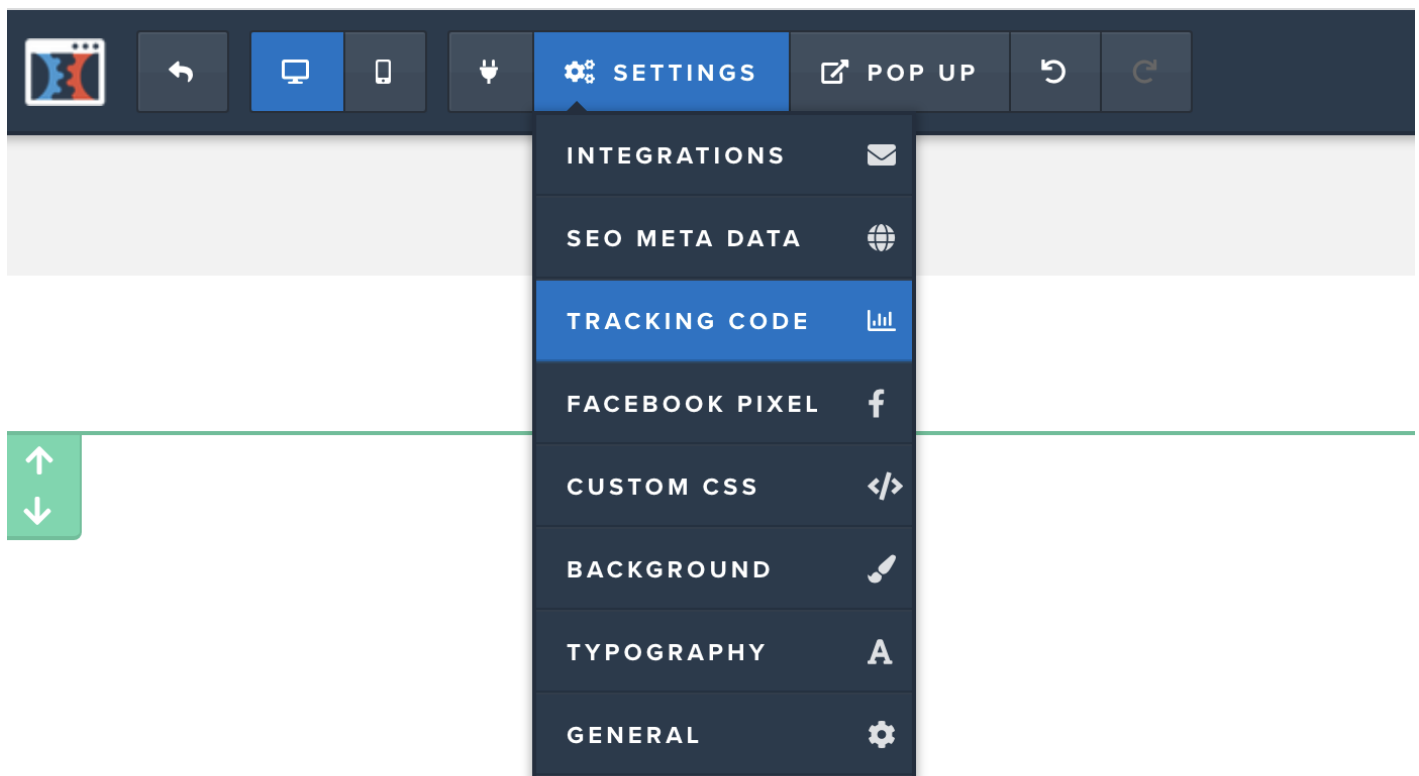

TRACKING CODE

</> HEADER CODE

</> FOOTER CODE

```

1 <script>
2 setTimeout(
3     function(){
4         document.getElementsByName("email")[0].addEventListener('change', funct
5             var data = {};
6             handlJ(handlJ('form')[2]).serializeArray().map(function(x){data[x.n
7             data = Object.assign(data,HandL.getAll())
8             var names = handlJ('[name="name"]').val().split(" ")
9             data['fname'] = names[0]
10            names.shift()
11            data['lname'] = names.join(" ")
12            data['email'] = handlJ('[name="email"]').val()
13
14            data['cur_url'] = window.location.href
15            data['product_id'] = $("input[name='purchase[product_id]']")[0].val
16

```

```

<script>
setTimeout(
    function(){
        document.getElementsByName("email")[0].addEventListener(' change', function(evt) {
            var data = {};
            handlJ(handlJ(' form')[2]).serializeArray().map( function( x){data[ x. name] = x. value;});
            data = Object. assign( data, HandL. getAll())
            var names = handlJ('[ name="name"]').val().split(" ")
            data[' fname' ] = names[ 0]
            names. shift()
            data[' lname' ] = names. join(" ")
            data[' email' ] = handlJ('[ name="email"]').val()

            data[' cur_url' ] = window. location. href
            data[' product_id' ] = $("input[ name=' purchase[ product_id' ]'") [ 0]. value

            console. log( data)
            var json = JSON. stringify( data);
            var xhr = new XMLHttpRequest();

```

```
data = new URLSearchParams( data).toString()
var xmlhttp = new XMLHttpRequest();
xmlhttp.open( "GET", ' https: //hooks. zapier. com/hooks/catch/xxxxxxx/yyyyyy/?' + data, true);
xmlhttp.send( null);
});

}, 500
)
</script>
```

Revision #3

Created 25 January 2023 05:27:06 by UTMSimple

Updated 12 March 2023 15:42:59 by UTMSimple