

# JotForm

- [Pass UTMs to embedded JotForm](#)

# Pass UTMs to embedded JotForm

## Create hidden fields to your form

Unique Name is key, it should match with our naming convention

The screenshot displays the JotForm builder interface. The top navigation bar includes 'BUILD', 'SETTINGS', and 'PUBLISH' tabs, with a 'Preview Form' toggle on the right. The main form area contains several dropdown menus for 'Campaign' and 'Lead Source', followed by a series of text input fields for UTM parameters: 'utm\_campaign', 'utm\_source', 'utm\_medium', 'utm\_content', 'utm\_term', 'fbclid', and '\_fbc'. The 'utm\_campaign' field is highlighted with a blue border and a yellow warning banner stating 'This field is hidden and will not be seen on the form.' The right sidebar contains various field settings: 'Placeholder', 'Hover Text', 'Default Value', 'Read Only' (OFF), 'Shrink' (OFF), 'Hide field' (ON), and 'Field Details'. The 'Field Details' section shows the 'Unique Name' as '{ utm\_campaign }' and the 'Field IDs' as '#input\_71'. The bottom of the interface shows a page navigation bar with 'PAGE 3', 'PAGE 4', 'PAGE 5', 'PAGE 6', 'THANK YOU PAGE', and a '+ ADD NEW PAGE' button.

## Embed iframe in your site

Append class as `utm-src` as seen in the pic

## </> CUSTOM JAVASCRIPT / HTML


```
1 <iframe class="utm-src" id="JotFormIFrame-230955334614153" title="Test Mentorship
Application" onload="window.parent.scrollTo(0,0)" allowtransparency="true"
allowfullscreen="true" allow="geolocation; microphone; camera"
src="https://form.jotform.com/230955334614153/prefill/645e69186639340a194bf8533fd0
" frameborder="0" style="min-width:100%;max-width:100%;height:539px;border:none;"
scrolling="no" > </iframe> <script type="text/javascript"> var ifr =
document.getElementById("JotFormIFrame-230955334614153"); if (ifr) { var src =
ifr.src; var iframeParams = []; if (window.location.href &&
window.location.href.indexOf("?") > -1) { iframeParams =
iframeParams.concat(window.location.href.substr(window.location.href.indexOf("?")
+ 1).split('&')); } if (src && src.indexOf("?") > -1) { iframeParams =
iframeParams.concat(src.substr(src.indexOf("?") + 1).split("&")); src =
src.substr(0, src.indexOf("?")) } iframeParams.push("isIframeEmbed=1"); ifr.src =
src + "?" + iframeParams.join('&'); } window.handleIframeMessage = function(e) {
if (typeof e.data === 'object') { return; } var args = e.data.split(":"); if
(args.length > 2) { iframe = document.getElementById("JotFormIFrame-" +
args[(args.length - 1)]); } else { iframe =
document.getElementById("JotFormIFrame"); } if (!iframe) { return; } switch
(args[0]) { case "scrollIntoView": iframe.scrollIntoView(); break; case
"setHeight": iframe.style.height = args[1] + "px"; if (!isNaN(args[1]) &&
parseInt(iframe.style.minHeight) > parseInt(args[1])) { iframe.style.minHeight =
args[1] + "px"; } break; case "collapseErrorPage": if (iframe.clientHeight >
window.innerHeight) { iframe.style.height = window.innerHeight + "px"; } break;
case "reloadPage": window.location.reload(); break; case "loadScript": if(
```

Add the following script

```
<script>
setTimeout(
function(){
  handl('utm-src').each( (i,t) => {
    handl_utm = HandL.getAll()
    var merged = handl.extend( {}, handl_utm, HandL.getSearchParams(this.href) )
    if (t.src !== undefined){
      var src = t.src.split("?")[0];
      if ( !$.isEmptyObject(merged) )
        t.src = src+"?" +$.param(merged)
    }
  })
}, 1000
```

)

</script>

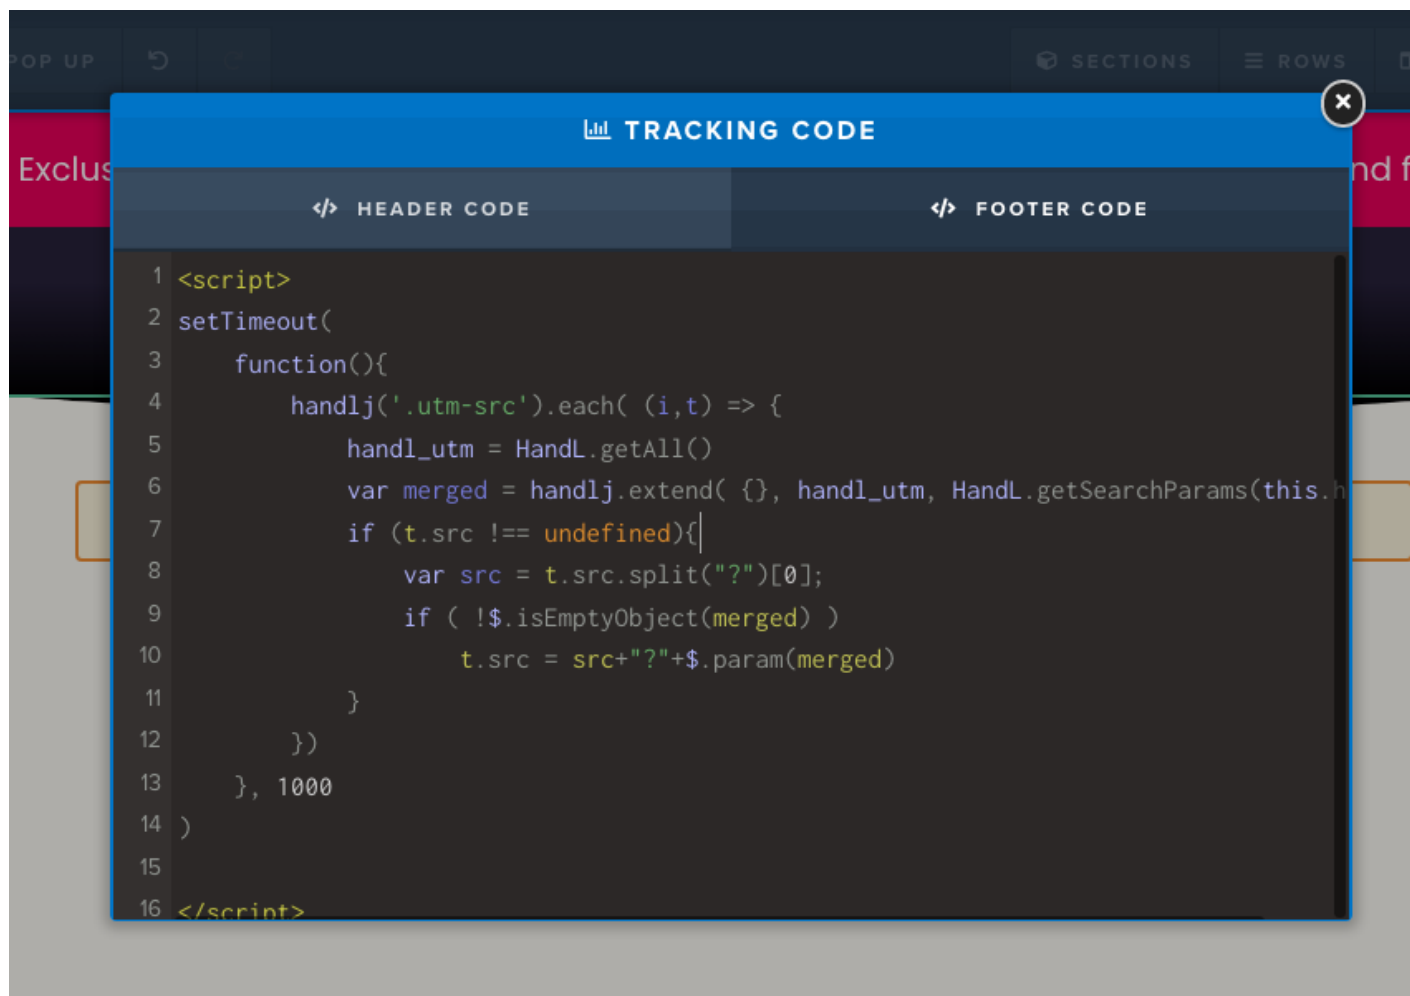

If the above solution does not work... Try this...

```
<script>
setTimeout(() => {
  if (typeof(handljl) == 'function'){
    var iframeParams = [];
    iframeParams.push( handljl.param(handljl.extend({}, HandL.getUrlVars(), HandL.getAll())) )
    var src = ifr.src;
    ifr.src = src + "?" + iframeParams.join('&');
  }
}, "500");
</script>
```