

JotForm

- [Pass UTMs to embedded JotForm](#)

Pass UTMs to embedded JotForm

Create hidden fields to your form

Unique Name is key, it should match with our naming convention

The screenshot displays the JotForm builder interface. The main form area contains several fields: 'Campaign' and 'Lead Source' (both dropdown menus with 'Please Select' as the default), a hidden field named 'utm_campaign' (highlighted with a yellow background and a warning icon), and four text input fields labeled 'utm_source', 'utm_medium', 'utm_content', and 'utm_term'. Below these are fields for 'fbclid' and '_fbc'. The right sidebar shows various field settings: 'Placeholder', 'Hover Text', 'Default Value', 'Read Only' (OFF), 'Shrink' (OFF), 'Hide field' (ON), and 'Field Details'. The 'Field Details' section shows the 'Unique Name' as '{ utm_campaign }' and the 'Field IDs' as '#input_71'. The bottom of the interface shows a navigation bar with 'PAGE 3', 'PAGE 4', 'PAGE 5', 'PAGE 6', 'THANK YOU PAGE', and a '+ ADD NEW PAGE' button.

Embed iframe in your site

Append class as `utm-src` as seen in the pic

</> CUSTOM JAVASCRIPT / HTML


```
1 <iframe class="utm-src" id="JotFormIFrame-230955334614153" title="Test Mentorship
Application" onload="window.scrollTo(0,0)" allowtransparency="true"
allowfullscreen="true" allow="geolocation; microphone; camera"
src="https://form.jotform.com/230955334614153/prefill/645e69186639340a194bf8533fd0
" frameborder="0" style="min-width:100%;max-width:100%;height:539px;border:none;"
scrolling="no" > </iframe> <script type="text/javascript"> var ifr =
document.getElementById("JotFormIFrame-230955334614153"); if (ifr) { var src =
ifr.src; var iframeParams = []; if (window.location.href &&
window.location.href.indexOf("?") > -1) { iframeParams =
iframeParams.concat(window.location.href.substr(window.location.href.indexOf("?")
+ 1).split('&')); } if (src && src.indexOf("?") > -1) { iframeParams =
iframeParams.concat(src.substr(src.indexOf("?") + 1).split("&")); src =
src.substr(0, src.indexOf("?")) } iframeParams.push("isIframeEmbed=1"); ifr.src =
src + "?" + iframeParams.join('&'); } window.handleIframeMessage = function(e) {
if (typeof e.data === 'object') { return; } var args = e.data.split(":"); if
(args.length > 2) { iframe = document.getElementById("JotFormIFrame-" +
args[(args.length - 1)]); } else { iframe =
document.getElementById("JotFormIFrame"); } if (!iframe) { return; } switch
(args[0]) { case "scrollIntoView": iframe.scrollIntoView(); break; case
"setHeight": iframe.style.height = args[1] + "px"; if (!isNaN(args[1]) &&
parseInt(iframe.style.minHeight) > parseInt(args[1])) { iframe.style.minHeight =
args[1] + "px"; } break; case "collapseErrorPage": if (iframe.clientHeight >
window.innerHeight) { iframe.style.height = window.innerHeight + "px"; } break;
case "reloadPage": window.location.reload(); break; case "loadScript": if(
```

Add the following script

```
<script>
setTimeout(
function(){
    handlj('.utm-src').each( (i,t) => {
        handl_utm = HandL.getAll()
        var merged = handlj.extend( {}, handl_utm, HandL.getSearchParams(this.href) )
        if (t.src !== undefined){
            var src = t.src.split("?")[0];
            if ( !$.isEmptyObject(merged) )
                t.src = src+"?" +$.param(merged)
        }
    })
}, 1000
```

)

</script>

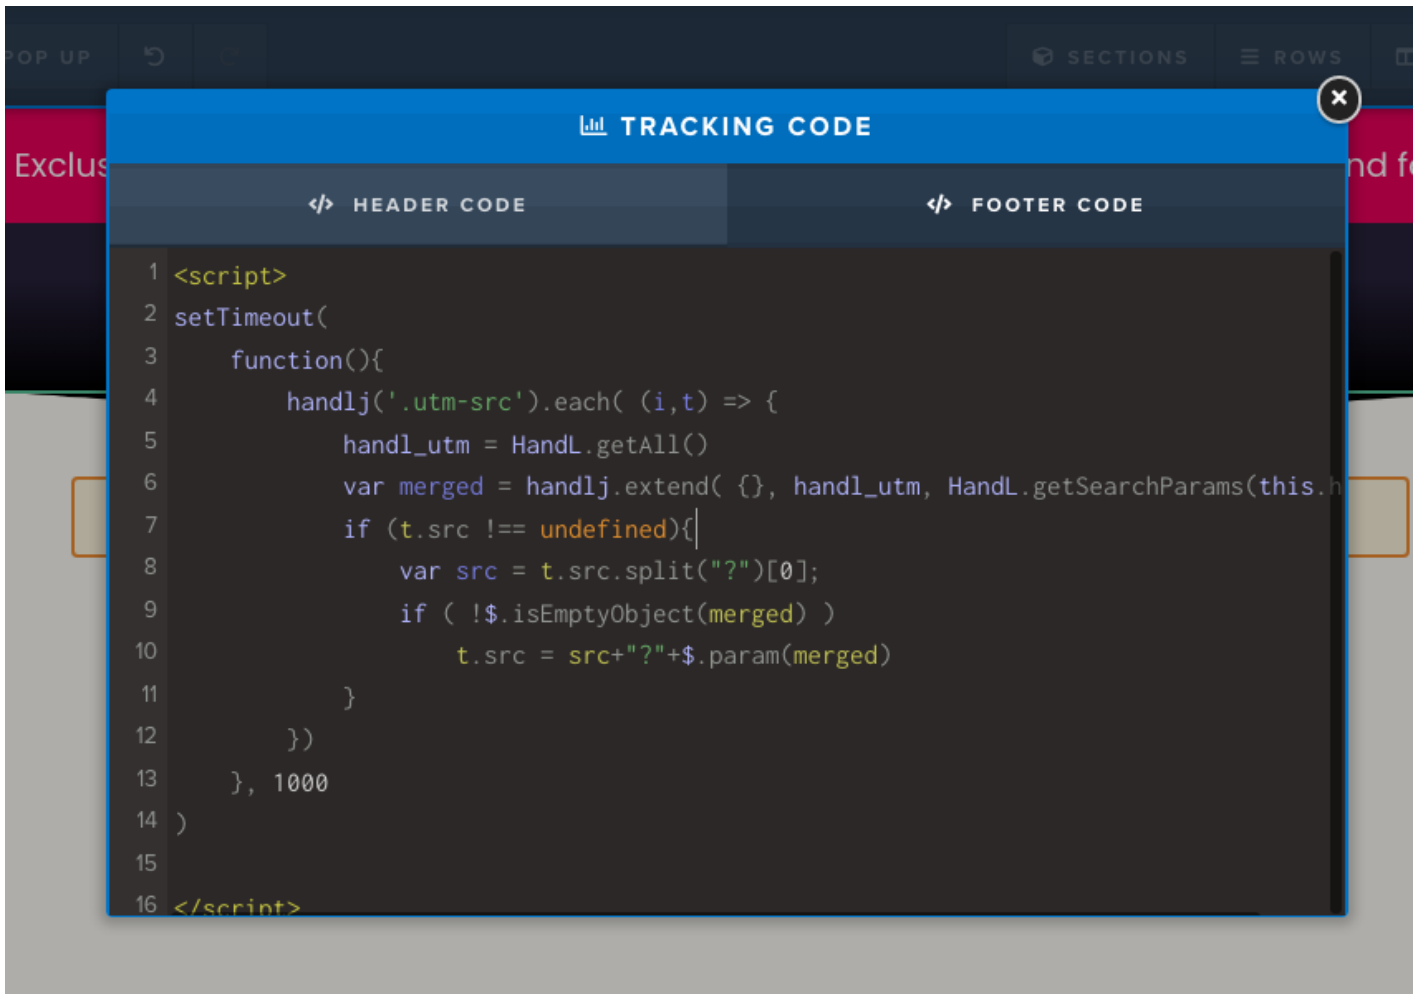

If the above solution does not work... Try this...

```
<script>
setTimeout(() => {
  if (typeof(handlj) == 'function'){
    var iframeParams = [];
    iframeParams.push( handlj.param(handlj.extend({}, HandL.getUrlVars(), HandL.getAll())) )
    var src = ifr.src;
    ifr.src = src + "?" + iframeParams.join('&');
  }
}, "500");
</script>
```