

# JotForm

- [Pass UTM's to embedded JotForm](#)

# Pass UTMs to embedded JotForm

## Create hidden fields to your form

Unique Name is key, it should match with our naming convention

The screenshot displays the JotForm builder interface. At the top, there are tabs for 'BUILD', 'SETTINGS', and 'PUBLISH', along with a 'Preview Form' toggle. The main workspace shows a form with several fields: 'Campaign' and 'Lead Source' (both dropdown menus), and a series of text input fields for 'utm\_campaign', 'utm\_source', 'utm\_medium', 'utm\_content', 'utm\_term', 'fbclid', and '\_fbc'. The 'utm\_campaign' field is highlighted with a blue border and a yellow warning banner that reads: 'This field is hidden and will not be seen on the form.' To the right, a dark sidebar contains various field settings: 'Placeholder', 'Hover Text', 'Default Value', 'Read Only' (OFF), 'Shrink' (OFF), 'Hide field' (ON), and 'Field Details'. The 'Field Details' section shows the 'Unique Name' as '{ utm\_campaign }' and the 'Field IDs' as '#input\_71'. At the bottom of the workspace, there are navigation buttons for 'PAGE 3', 'PAGE 4', 'PAGE 5', 'PAGE 6', 'THANK YOU PAGE', and '+ ADD NEW PAGE'.

## Embed iframe in your site

Append class as `utm-src` as seen in the pic


## </> CUSTOM JAVASCRIPT / HTML

```
1 <iframe class="utm-src" id="JotFormIFrame-230955334614153" title="Test Mentorship
Application" onload="window.scrollTo(0,0)" allowtransparency="true"
allowfullscreen="true" allow="geolocation; microphone; camera"
src="https://form.jotform.com/230955334614153/prefill/645e69186639340a194bf8533fd0
" frameborder="0" style="min-width:100%;max-width:100%;height:539px;border:none;"
scrolling="no" > </iframe> <script type="text/javascript"> var ifr =
document.getElementById("JotFormIFrame-230955334614153"); if (ifr) { var src =
ifr.src; var iframeParams = []; if (window.location.href &&
window.location.href.indexOf("?") > -1) { iframeParams =
iframeParams.concat(window.location.href.substr(window.location.href.indexOf("?")
+ 1).split('&')); } if (src && src.indexOf("?") > -1) { iframeParams =
iframeParams.concat(src.substr(src.indexOf("?") + 1).split("&")); src =
src.substr(0, src.indexOf("?")) } iframeParams.push("isIframeEmbed=1"); ifr.src =
src + "?" + iframeParams.join('&'); } window.handleIFrameMessage = function(e) {
if (typeof e.data === 'object') { return; } var args = e.data.split(":"); if
(args.length > 2) { iframe = document.getElementById("JotFormIFrame-" +
args[(args.length - 1)]); } else { iframe =
document.getElementById("JotFormIFrame"); } if (!iframe) { return; } switch
(args[0]) { case "scrollIntoView": iframe.scrollIntoView(); break; case
"setHeight": iframe.style.height = args[1] + "px"; if (!isNaN(args[1]) &&
parseInt(iframe.style.minHeight) > parseInt(args[1])) { iframe.style.minHeight =
args[1] + "px"; } break; case "collapseErrorPage": if (iframe.clientHeight >
window.innerHeight) { iframe.style.height = window.innerHeight + "px"; } break;
case "reloadPage": window.location.reload(); break; case "loadScript": if(
```

## Add the following script

```
<script>
setTimeout(
  function(){
    handl('.utm-src').each( (i,t) => {
      handl_utm = HandL.getAll()
      var merged = handl.extend( {}, handl_utm, HandL.getSearchParams(this.href) )
      if (t.src !== undefined){
        var src = t.src.split("?")[0];
        if ( !$.isEmptyObject(merged) )
          t.src = src+"?"+$param(merged)
      }
    })
  }, 1000
)
```

```
</script>
```

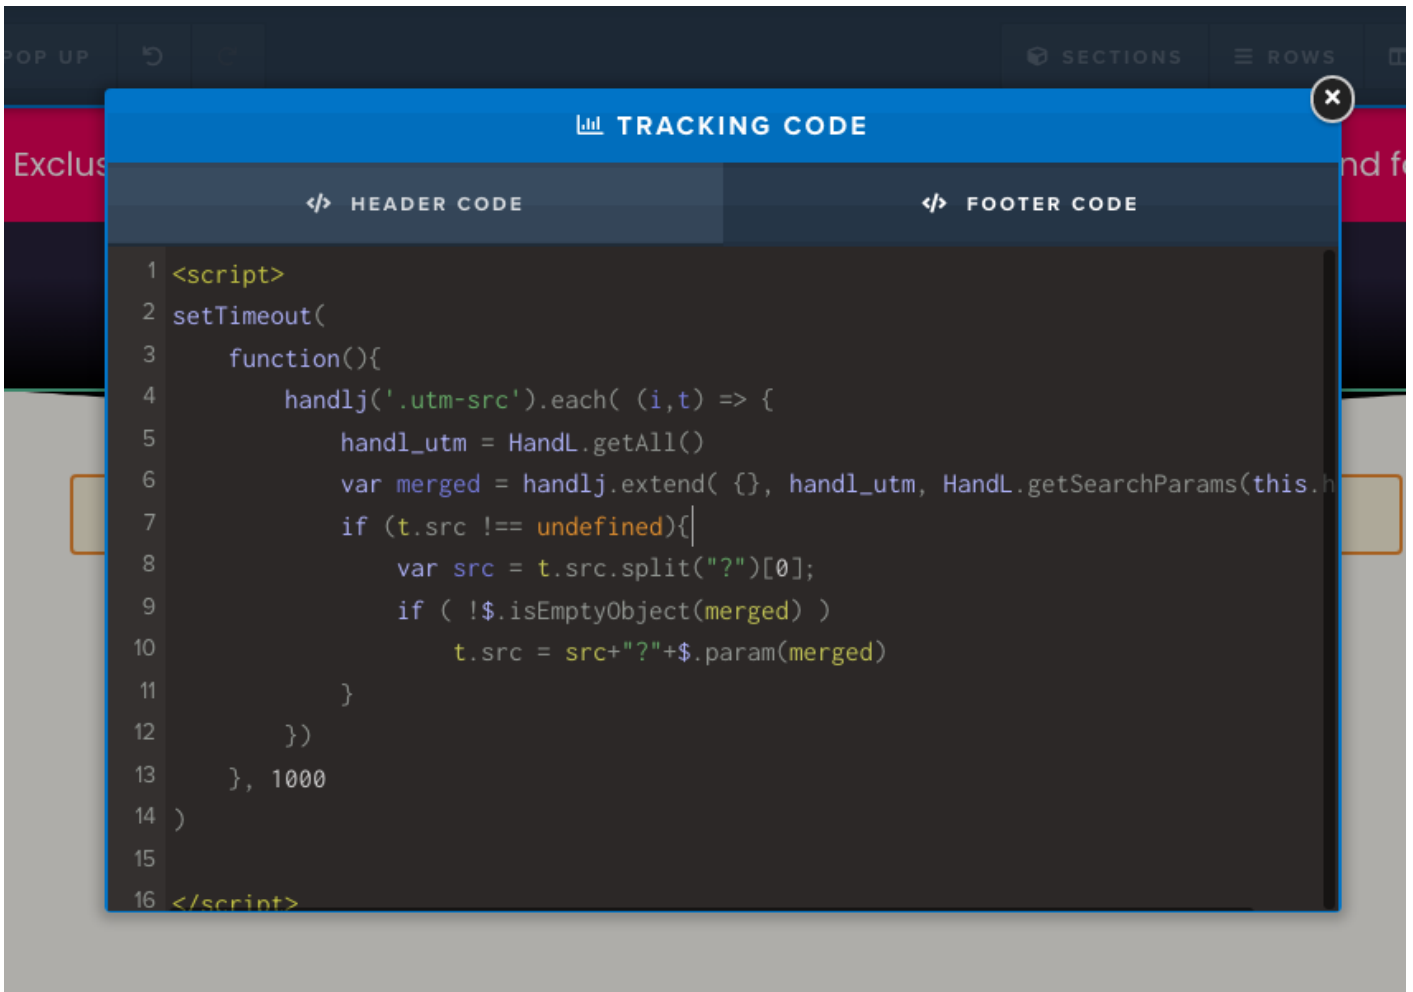

The screenshot shows a code editor window titled "TRACKING CODE" with two tabs: "HEADER CODE" and "FOOTER CODE". The "FOOTER CODE" tab is active, displaying the following JavaScript code:

```
1 <script>
2 setTimeout(
3   function(){
4     handlj('.utm-src').each( (i,t) => {
5       handl_utm = HandL.getAll()
6       var merged = handlj.extend( {}, handl_utm, HandL.getSearchParams(this.h
7       if (t.src !== undefined){
8         var src = t.src.split("?")[0];
9         if ( !$.isEmptyObject(merged) )
10            t.src = src+"?"+"$.param(merged)
11       }
12     })
13   }, 1000
14 )
15
16 </script>
```

If the above solution does not work... Try this...

```
<script>
setTimeout(() => {
  if (typeof(handlj) == 'function'){
    var iframeParams = [];
    iframeParams.push( handlj.param(handlj.extend({}, HandL.getUrlVars(), HandL.getAll())) )
    var src = ifr.src;
    ifr.src = src + "?" + iframeParams.join('&');
  }
}, "500");
</script>
```