

Pass UTMs to embedded JotForm

Create hidden fields to your form

Unique Name is key, it should match with our naming convention

The screenshot displays the JotForm builder interface. At the top, there are navigation tabs: BUILD, SETTINGS, and PUBLISH. A 'Preview Form' toggle is visible in the top right corner. The main workspace shows a form with several dropdown menus for 'Campaign' and 'Lead Source'. Below these, a text input field is highlighted with a blue border and labeled 'utm_campaign'. A yellow tooltip below this field states: 'This field is hidden and will not be seen on the form.' Below the highlighted field are other text input fields labeled 'utm_source', 'utm_medium', 'utm_content', 'utm_term', 'fbclid', and '_fbc'. On the right side, a settings panel is open, showing various options for the selected field: Placeholder, Hover Text, Default Value, Read Only (OFF), Shrink (OFF), Hide field (ON), and Field Details. The Field Details section shows the Unique Name as '{ utm_campaign }' and the Field ID as '#input_71'. At the bottom of the interface, there are navigation links for 'PAGE 3', 'PAGE 4', 'PAGE 5', 'PAGE 6', 'THANK YOU PAGE', and a '+ ADD NEW PAGE' button.

Embed iframe in your site

Append class as `utm-src` as seen in the pic


</> CUSTOM JAVASCRIPT / HTML

```
1 <iframe class="utm-src" id="JotFormIFrame-230955334614153" title="Test Mentorship
Application" onload="window.scrollTo(0,0)" allowtransparency="true"
allowfullscreen="true" allow="geolocation; microphone; camera"
src="https://form.jotform.com/230955334614153/prefill/645e69186639340a194bf8533fd0
" frameborder="0" style="min-width:100%;max-width:100%;height:539px;border:none;"
scrolling="no" > </iframe> <script type="text/javascript"> var ifr =
document.getElementById("JotFormIFrame-230955334614153"); if (ifr) { var src =
ifr.src; var iframeParams = []; if (window.location.href &&
window.location.href.indexOf("?") > -1) { iframeParams =
iframeParams.concat(window.location.href.substr(window.location.href.indexOf("?")
+ 1).split('&')); } if (src && src.indexOf("?") > -1) { iframeParams =
iframeParams.concat(src.substr(src.indexOf("?") + 1).split("&")); src =
src.substr(0, src.indexOf("?")) } iframeParams.push("isIframeEmbed=1"); ifr.src =
src + "?" + iframeParams.join('&'); } window.handleIFrameMessage = function(e) {
if (typeof e.data === 'object') { return; } var args = e.data.split(":"); if
(args.length > 2) { iframe = document.getElementById("JotFormIFrame-" +
args[(args.length - 1)]); } else { iframe =
document.getElementById("JotFormIFrame"); } if (!iframe) { return; } switch
(args[0]) { case "scrollIntoView": iframe.scrollIntoView(); break; case
"setHeight": iframe.style.height = args[1] + "px"; if (!isNaN(args[1]) &&
parseInt(iframe.style.minHeight) > parseInt(args[1])) { iframe.style.minHeight =
args[1] + "px"; } break; case "collapseErrorPage": if (iframe.clientHeight >
window.innerHeight) { iframe.style.height = window.innerHeight + "px"; } break;
case "reloadPage": window.location.reload(); break; case "loadScript": if(
```

Add the following script

```
<script>
setTimeout(
  function(){
    handl('.utm-src').each( (i,t) => {
      handl_utm = HandL.getAll()
      var merged = handl.extend( {}, handl_utm, HandL.getSearchParams(this.href) )
      if (t.src !== undefined){
        var src = t.src.split("?")[0];
        if ( !$.isEmptyObject(merged) )
          t.src = src+"?"+"$.param(merged)
      }
    })
  }, 1000
)
```

```
</script>
```

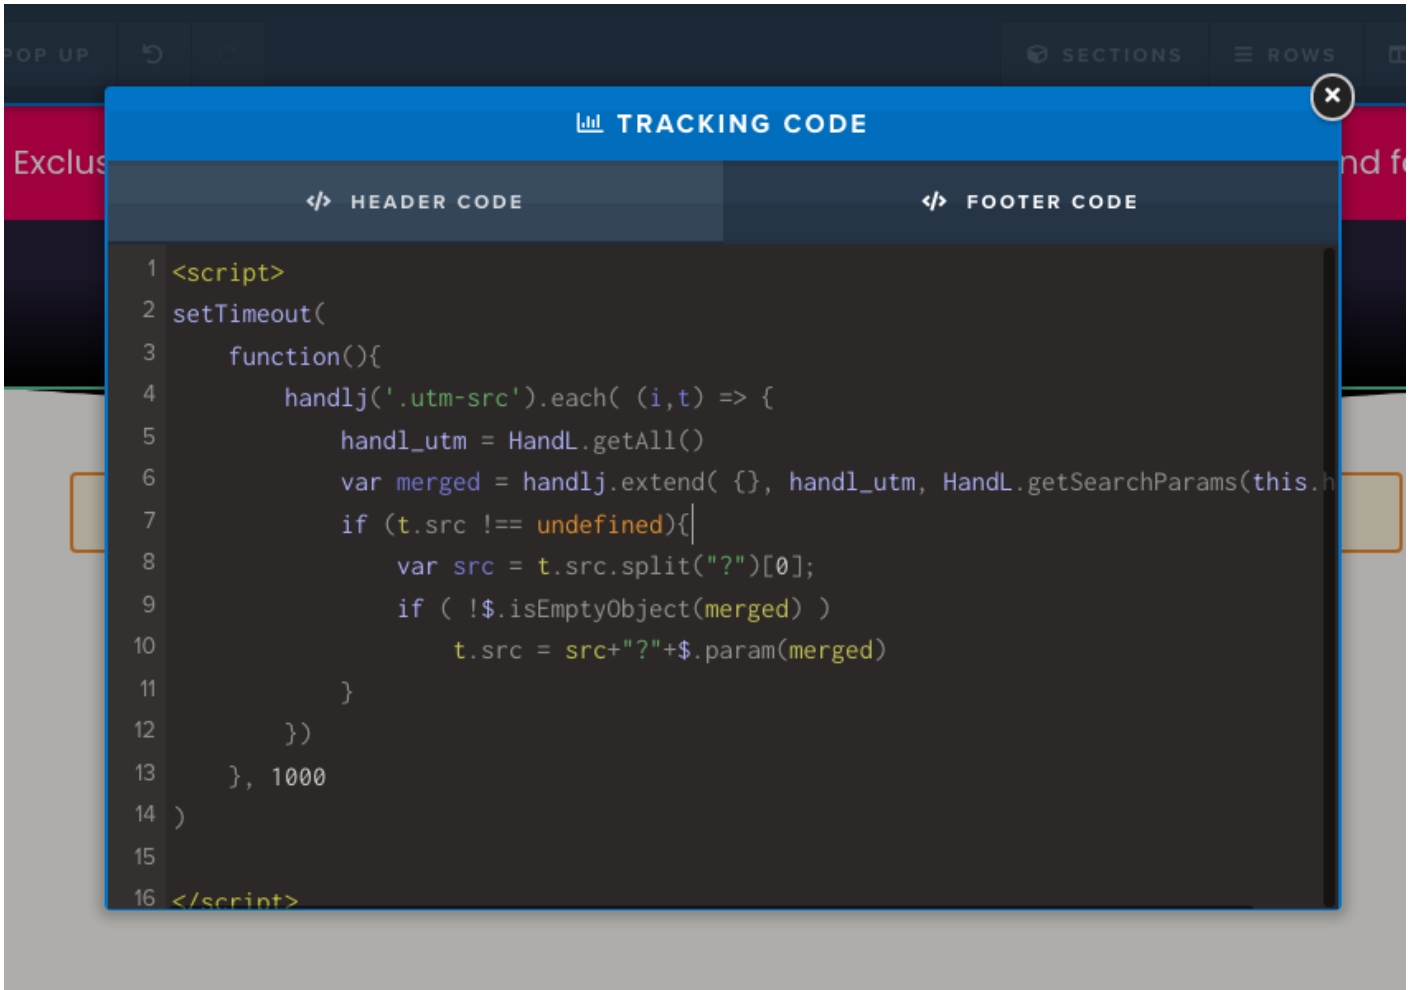

The screenshot shows a code editor window titled "TRACKING CODE" with two tabs: "HEADER CODE" and "FOOTER CODE". The "HEADER CODE" tab is active, displaying the following JavaScript code:

```
1 <script>
2 setTimeout(
3   function(){
4     handlj('.utm-src').each( (i,t) => {
5       handl_utm = HandL.getAll()
6       var merged = handlj.extend( {}, handl_utm, HandL.getSearchParams(this.h
7       if (t.src !== undefined){
8         var src = t.src.split("?")[0];
9         if ( !$.isEmptyObject(merged) )
10            t.src = src+"?"+"$.param(merged)
11       }
12     })
13   }, 1000
14 )
15
16 </script>
```

If the above solution does not work... Try this...

```
<script>
setTimeout(() => {
  if (typeof(handlj) == 'function'){
    var iframeParams = [];
    iframeParams.push( handlj.param(handlj.extend({}, HandL.getUrlVars(), HandL.getAll())) )
    var src = ifr.src;
    ifr.src = src + "?" + iframeParams.join('&');
  }
}, "500");
</script>
```

Revision #2

Created 16 May 2023 19:42:30 by UTMSimple

Updated 1 June 2023 06:29:58 by UTMSimple